

Unit 2: Locomotion Kinematics of Wheeled Robots: Part 2

Computer Science 4766/6912

Department of Computer Science
Memorial University of Newfoundland

May 23, 2018

1 Robot Kinematic Constraints

- Example: A Differential-Drive Robot
- Example: A Turning Bicycle
- Using the Forward Kinematic Equation

Robot Kinematic Constraints

- The kinematic constraints on a robot come from the combination of constraints from its wheels:
 - The rolling constraint:


$$[\sin(\alpha + \beta) \quad -\cos(\alpha + \beta) \quad (-l) \cos(\beta)] \dot{\xi}_R = r \dot{\phi}$$

- The sliding constraint:

$$[\cos(\alpha + \beta) \quad \sin(\alpha + \beta) \quad l \sin(\beta)] \dot{\xi}_R = 0$$

- Castor, Swedish, and spherical wheels impose no constraints
- Therefore we consider only constraints from fixed and steerable standard wheels
- For each wheel, we have both rolling and sliding constraints; Therefore, two equations per wheel
- We stack all of these constraints together into matrix form as illustrated in the examples that follow...

Example: A Differential-Drive Robot



- Our D-D robot has two fixed standard wheels, plus a Castor wheel for stability (plays no part in the analysis)
- The parameters of the two FSW's are as follows:
 - Right wheel:
 - $\alpha_r = -\frac{\pi}{2}$
 - $\beta_r = \pi$ (+ve spin should cause movement in $+X_R$ direction)
 - Left wheel:
 - $\alpha_l = \frac{\pi}{2}$
 - $\beta_l = 0$
- Assume that the two wheels are equidistant from P at a distance of l

Here are the rolling constraints for both wheels:

$$\begin{bmatrix} \sin(\alpha_r + \beta_r) & -\cos(\alpha_r + \beta_r) & (-l) \cos(\beta_r) \\ \sin(\alpha_l + \beta_l) & -\cos(\alpha_l + \beta_l) & (-l) \cos(\beta_l) \end{bmatrix} \dot{\xi}_R = r \begin{bmatrix} \dot{\phi}_r \\ \dot{\phi}_l \\ 0 \end{bmatrix}$$

Now the sliding constraints:

$$\begin{bmatrix} \cos(\alpha_r + \beta_r) & \sin(\alpha_r + \beta_r) & l \sin(\beta_r) \\ \cos(\alpha_l + \beta_l) & \sin(\alpha_l + \beta_l) & l \sin(\beta_l) \end{bmatrix} \dot{\xi}_R = 0$$

Combine all of the above into one big equation:

$$\begin{bmatrix} \sin(\alpha_r + \beta_r) & -\cos(\alpha_r + \beta_r) & (-l) \cos(\beta_r) \\ \sin(\alpha_l + \beta_l) & -\cos(\alpha_l + \beta_l) & (-l) \cos(\beta_l) \\ \cos(\alpha_r + \beta_r) & \sin(\alpha_r + \beta_r) & l \sin(\beta_r) \\ \cos(\alpha_l + \beta_l) & \sin(\alpha_l + \beta_l) & l \sin(\beta_l) \end{bmatrix} \dot{\xi}_R = r \begin{bmatrix} \dot{\phi}_r \\ \dot{\phi}_l \\ 0 \\ 0 \end{bmatrix}$$


Our overall equation is,

$$\begin{bmatrix} 1 & 0 & l \\ 1 & 0 & -l \\ 0 & 1 & 0 \\ 0 & 1 & 0 \end{bmatrix} \dot{\xi}_R = r \begin{bmatrix} \dot{\phi}_r \\ \dot{\phi}_l \\ 0 \\ 0 \end{bmatrix}$$

We solve for $\dot{\xi}_R$.

COVERED ON BOARD

Example: A Turning Bicycle

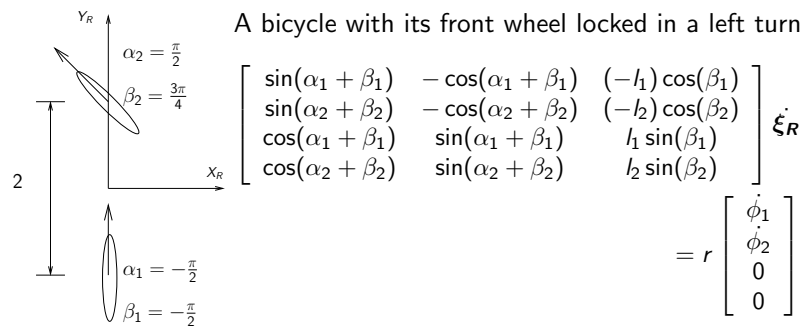

$$\begin{bmatrix} 0 & 1 & 0 \\ -\sqrt{2}/2 & \sqrt{2}/2 & \sqrt{2}/2 \\ -1 & 0 & -1 \\ -\sqrt{2}/2 & -\sqrt{2}/2 & \sqrt{2}/2 \end{bmatrix} \dot{\xi}_R = r \begin{bmatrix} \dot{\phi}_1 \\ \dot{\phi}_2 \\ 0 \\ 0 \end{bmatrix}$$

We apply Gauss-Jordan elimination to determine both the solution, and the condition on the existence of the solution

$$\left[\begin{array}{ccc|c} 0 & 1 & 0 & r \dot{\phi}_1 \\ -\sqrt{2}/2 & \sqrt{2}/2 & \sqrt{2}/2 & r \dot{\phi}_2 \\ -1 & 0 & -1 & 0 \\ -\sqrt{2}/2 & -\sqrt{2}/2 & \sqrt{2}/2 & 0 \end{array} \right] \rightarrow \text{row exchanges and combinations}$$

After a number of steps, we arrive at,

$$\left[\begin{array}{ccc|c} 1 & 0 & 0 & -r\dot{\phi}_1/2 \\ 0 & 1 & 0 & r\dot{\phi}_1 \\ 0 & 0 & 1 & r\dot{\phi}_1/2 \\ 0 & 0 & 0 & r\left(\frac{\sqrt{2}}{2}\dot{\phi}_2 - \dot{\phi}_1\right) \end{array} \right]$$

Yielding the following

$$\dot{x}_R = -r\dot{\phi}_1/2, \quad \dot{y}_R = r\dot{\phi}_1, \quad \dot{\theta} = r\dot{\phi}_1/2,$$

$$\dot{\phi}_1 = \frac{\sqrt{2}}{2}\dot{\phi}_2$$

This last equation is a condition on the existence of solutions; Unlike a differential drive robot, the two wheel speeds here cannot be set arbitrarily

Using the Forward Kinematic Equation

- Odometry:

- One use for the forward kinematic equation is to allow a robot's current pose to be tracked (known as odometry or *dead reckoning*)
- Let us say we know $\xi_j(t)$ for the previous time step and we wish to determine the pose for current time t'
- From the motors' optical encoders we can get an estimate of the wheels' current roll speeds: $\dot{\phi}_1, \dot{\phi}_2, \dots$
- Using the forward kinematic equation we obtain: $\dot{\xi}_R$
- We can obtain $\dot{\xi}_I$ using our current estimate for θ
- We apply a first-order Taylor series expansion:

$$\xi_I(t') = \xi_I(t) + (t' - t)\dot{\xi}_I(t) + \dots$$

- (The "... " represents higher-order terms that we don't bother to include in a first-order approximation)
- This equation can be applied iteratively to localize the robot over time. However, it will certainly drift as time passes.